


外觀圖 Outling Drawing

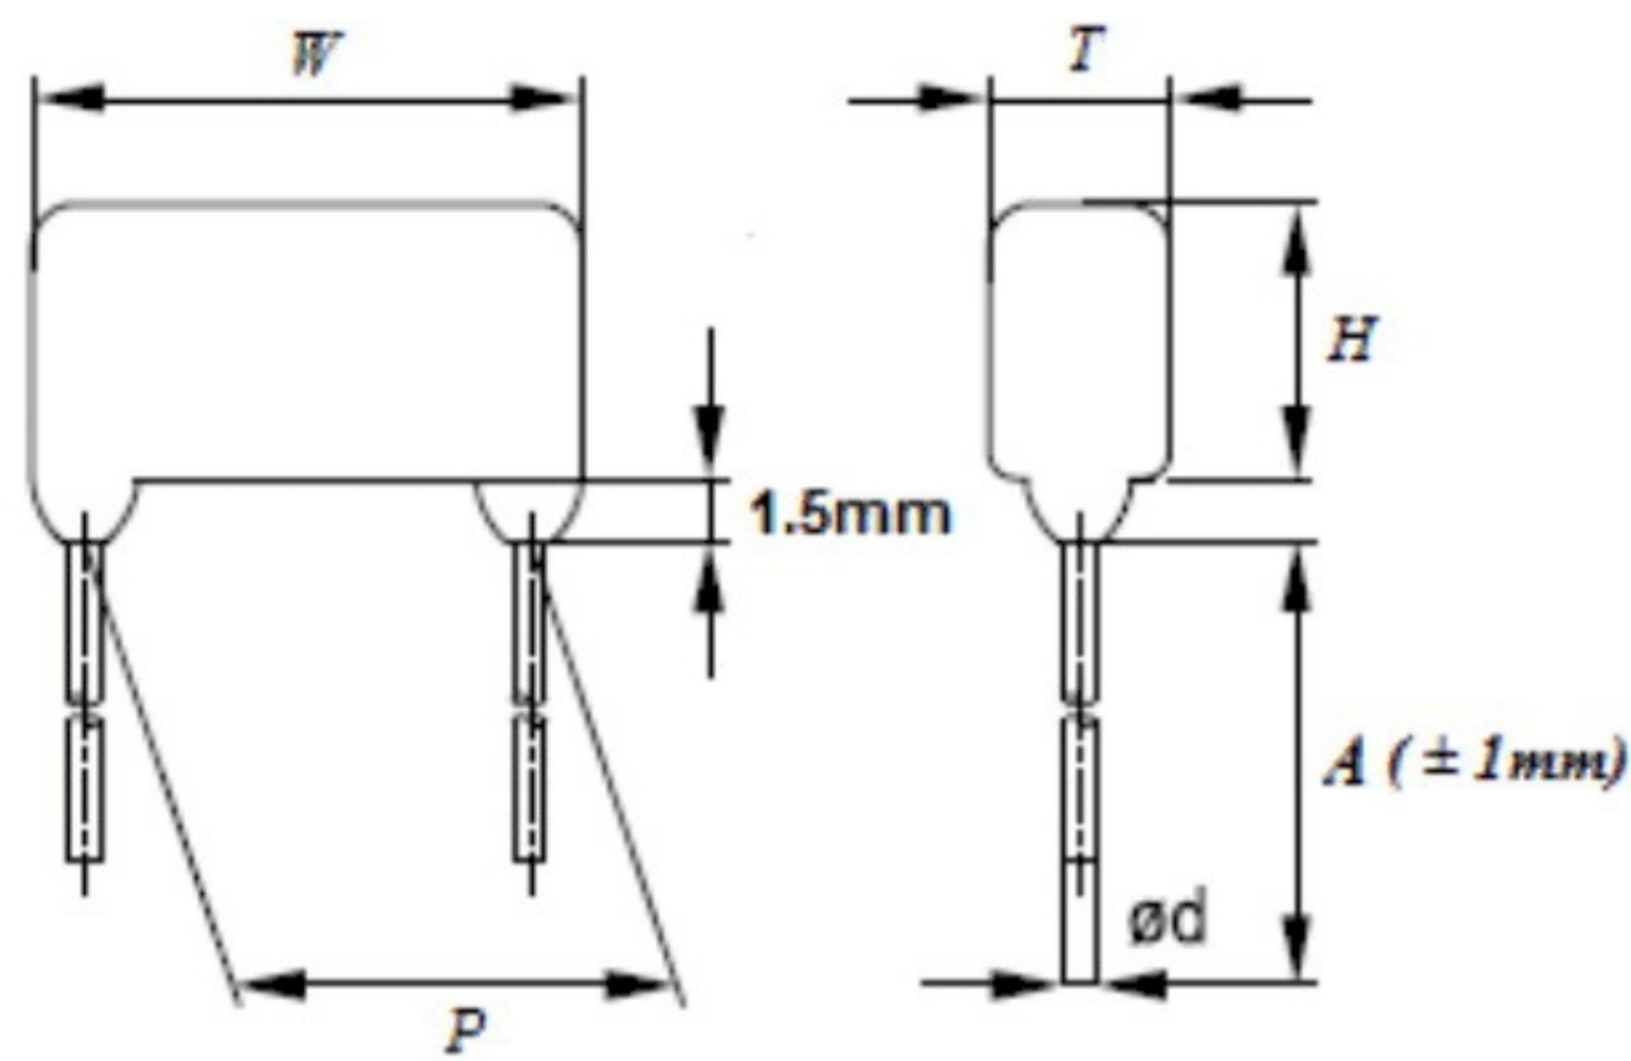

主要用途

大屏幕顯示器及彩電行逆和電路  
適用於高脈衝，大電流電路  
適用於電子鎮流器

Typical Applications

Horizontal resonance circuits of large screen monitor and color TV  
Suitable for high pulse and high current loading circuit  
Suitable for electronic ballast

特點

金屬化聚丙烯膜，無感卷繞結構  
高頻損耗小  
內部溫升小

Features

Metalized polypropylene film, non-inductive wound construction  
Low loss at high frequency  
Small inherent temperature rise

規格書 SPECIFICATION

引用標準 Reference Standard	GB/T 10190 (IEC 60384-16)	
氣候類別 Climatic Category	55/105/56	
工作溫度範圍 Operating Temperature Range	- 40°C~+105°C (+85°C to +105°C: decreasing factor 1.25% per°C for UR)	
電容量範圍 Capacitance Range	0.0001uF ~ 0.1uF	
額定電壓 Rated Voltage	630V, 800V, 1000V, 1250V, 1600V, 2000V, 3000V	
電容偏差 Capacitance Tolerance	± 5%(J)、± 10%(K)	
承受電壓 Voltage Proof	1.5UR (5s)	
損耗角 Dissipation Factor	≤0.10% (20°C,1kHz)	
絕緣電阻 Insulation Resistance	UR≤100V	CR ≤ 0.33uF IR ≥ 100,000MΩ CR > 0.33uF IR ≥ 30,000S

外型尺寸表 Dimension(mm)

630/800Vdc					
容量 μF	W	H	T	P	d
0.0010	18.5	12	7	15	0.8
0.0015	18.5	13	7.5	15	0.8
0.0018	18.5	13.5	8	15	0.8
0.0022	18.5	14	9	15	0.8
0.0024	18.5	14.5	9	15	0.8
0.0027	18.5	14.5	9.5	15	0.8
0.0033	18.5	15.5	10	15	0.8
0.0039	18.5	13.5	8.5	15	0.8
0.0043	18.5	14	8.5	15	0.8
0.0047	18.5	14	9	15	0.8
0.0053	18.5	14.5	9.5	15	0.8
0.0056	18.5	14.5	9.5	15	0.8
0.0068	18.5	15.5	10.5	15	0.8
0.0075	18.5	16	10.5	15	0.8
0.0082	18.5	16.5	11	15	0.8
0.0084	18.5	16.5	11	15	0.8
0.0091	18.5	17	11.5	15	0.8
0.010	18.5	17.5	12	15	0.8
0.015	18.5	14	8.5	15	0.8
0.018	18.5	14.5	9.5	15	0.8
0.022	18.5	15.5	10	15	0.8
0.024	18.5	15.5	10.5	15	0.8
0.027	18.5	16	11	15	0.8
0.033	23	16	9.5	20	0.8
0.036	23	16.5	9.5	20	0.8
0.039	23	16.5	10	20	0.8
0.047	23	17.5	11	20	0.8
0.056	23	18.5	11.5	20	0.8
0.068	26	19	11	22.5	0.8
0.10	26	21.5	13	22.5	0.8

1000/1250Vdc					
容量 μF	W	H	T	P	d
0.0010	18.5	12	7	15	0.8
0.0015	18.5	13	7.5	15	0.8
0.0018	18.5	13.5	8	15	0.8
0.0022	18.5	14	9	15	0.8
0.0024	18.5	14.5	9	15	0.8
0.0027	18.5	14.5	9.5	15	0.8
0.0033	18.5	15.5	10	15	0.8
0.0036	18.5	13	8	15	0.8
0.0039	18.5	13.5	8.5	15	0.8
0.0043	18.5	14	8.5	15	0.8
0.0047	18.5	14	9	15	0.8
0.0053	18.5	14.5	9.5	15	0.8
0.0056	18.5	14.5	9.5	15	0.8
0.0062	23	14.5	7.5	20	0.8
0.0065	23	14.5	8	20	0.8
0.0068	23	14.5	8	20	0.8
0.0072	23	15	8	20	0.8
0.0075	23	15	8	20	0.8
0.0078	23	15	8.5	20	0.8
0.0082	23	15.5	8.5	20	0.8
0.0084	23	15.5	8.5	20	0.8
0.010	23	16	9	20	0.8
0.012	23	16.5	10	20	0.8
0.015	29	15.5	9	25	0.8
0.018	29	16.5	9.5	25	0.8
0.022	29	18.5	10	25	0.8
0.024	29	18.5	10.5	25	0.8
0.027	29	19	11	25	0.8
0.033	29	20.5	12	25	0.8
0.036	29	20.5	12.5	25	0.8

外型尺寸表 Dimension(mm)

1600/2000Vdc					
容量 μF	W	H	T	P	d
0.0010	18.5	12	7	15	0.8
0.0012	18.5	12.5	7	15	0.8
0.0015	18.5	13	7.5	15	0.8
0.0016	18.5	13	8	15	0.8
0.0018	18.5	13.5	8	15	0.8
0.0020	18.5	13.5	8.5	15	0.8
0.0022	18.5	14	9	15	0.8
0.0024	18.5	14.5	9	15	0.8
0.0027	18.5	14.5	9.5	15	0.8
0.0030	18.5	15	10	15	0.8
0.0033	18.5	15.5	10	15	0.8
0.0036	23	14.5	9	20	0.8
0.0039	23	15.5	9	20	0.8
0.0043	23	16	9	20	0.8
0.0047	23	16	9.5	20	0.8
0.0049	23	16.5	9.5	20	0.8
0.0051	23	16.5	10	20	0.8
0.0053	23	16.5	10	20	0.8
0.0056	23	17	10	20	0.8
0.0060	23	15.5	8.5	20	0.8
0.0062	23	15.5	9	20	0.8
0.0065	23	15.5	9	20	0.8
0.0068	23	16	9	20	0.8
0.0072	23	16	9.5	20	0.8
0.0075	23	16.5	9.5	20	0.8
0.0078	23	16.5	9.5	20	0.8
0.0082	23	16.5	10	20	0.8
0.0084	23	16.5	10	20	0.8
0.0091	23	17	10.5	20	0.8

1600/2000Vdc					
容量 μF	W	H	T	P	d
0.010	29	15.5	8.5	25	0.8
0.012	29	16	9.5	25	0.8
0.015	29	18	9.5	25	0.8
0.018	29	19	10.5	25	0.8
0.022	29	20	11.5	25	0.8
0.024	29	20.5	12	25	0.8
0.027	31	20.5	12	27.5	0.8
0.033	31	21.5	13	27.5	0.8
0.036	31	22	13.5	27.5	0.8
3000Vdc					
0.0001	18.5	8.5	4.5	15	0.8
0.00015	18.5	9	5	15	0.8
0.00022	18.5	9.5	5.5	15	0.8
0.00033	18.5	10	6	15	0.8
0.00039	18.5	10.5	7	15	0.8
0.00047	18.5	11.5	8	15	0.8
0.00056	22	14	6	20	0.8
0.00068	22	16	8	20	0.8
0.00082	22	18	10	20	0.8
0.001	24	12	4	22.5	0.8
0.0015	24	14	6	22.5	0.8
0.0022	24	16	8	22.5	0.8
0.0033	24	18	10	22.5	0.8
0.0039	24	20	22	22.5	0.8
0.0047	31	12	4	27.5	0.8
0.0056	31	14	6	27.5	0.8
0.0068	31	16	8	27.5	0.8
0.0082	31	18	10	27.5	0.8
0.01	31	20	12	27.5	0.8