
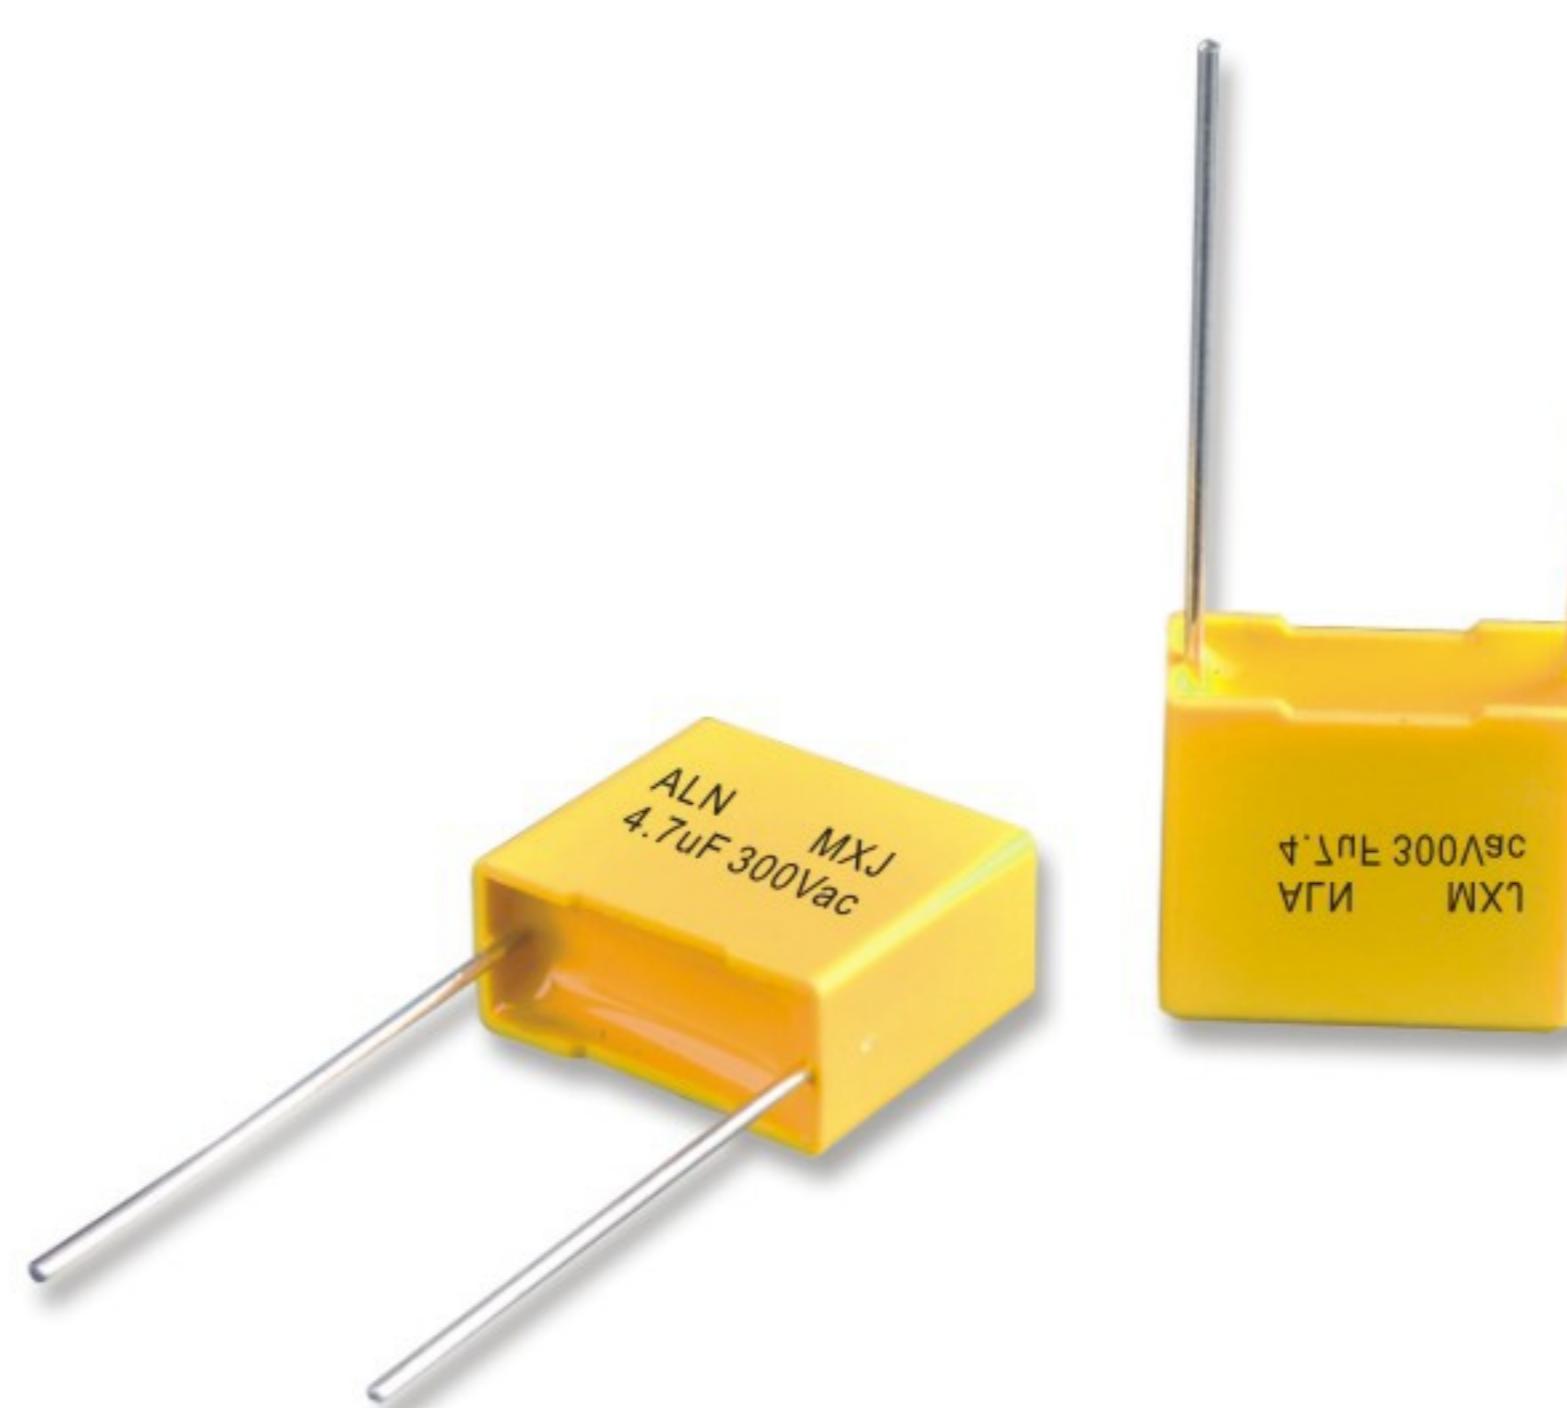


外觀圖 Outling Drawing

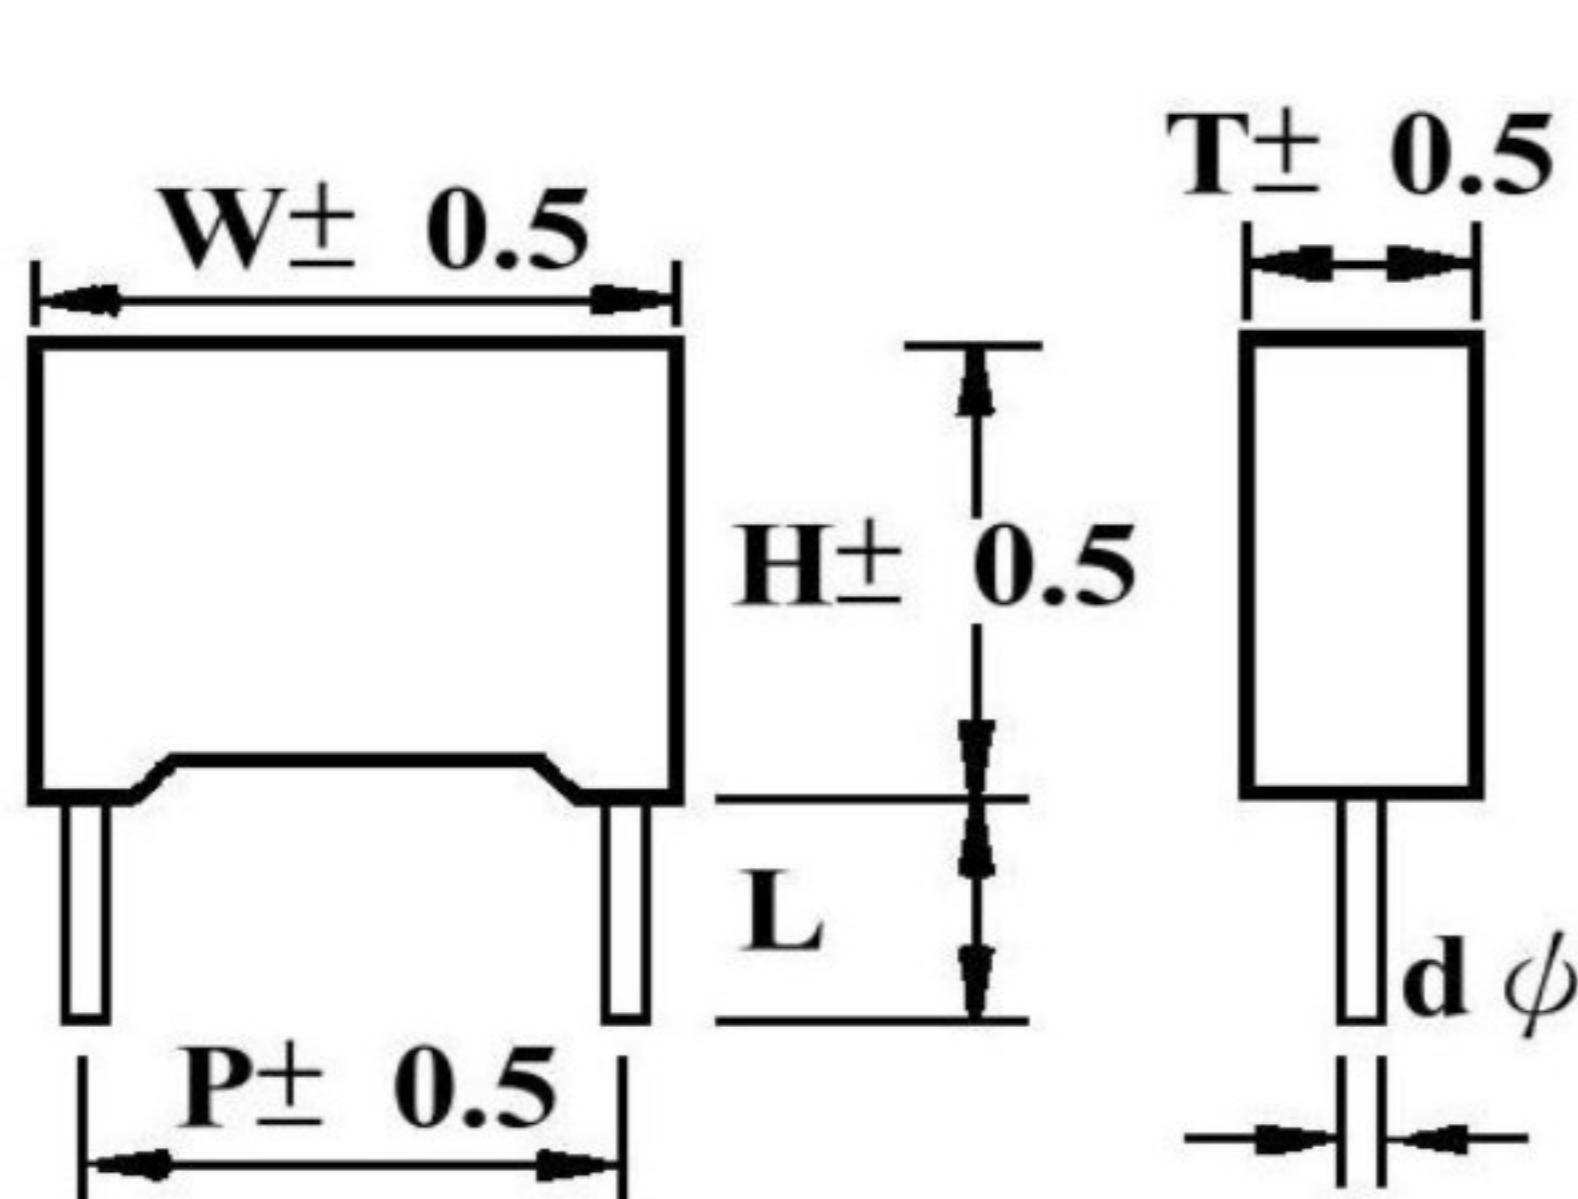

主要用途

專門設計用于與電源串聯的電容降壓電路場合，
如電表，LED驅動模塊等

Typical Applications

This is specifically designed for applications in serial
with the main, Capacitive divider, for example,
Energy meter, LED driver etc.

特點

自愈性能優異，能承受浪涌電壓衝擊
長期負載下優異的電容量穩定性
優異的防潮性能
優異的阻燃特性能

Features

Good self-healing properties, with standing surge
Voltage stressing
Long stability of capacitance
Good properties in damp environment
Excellent active and passive flame resistant abilities

規格書 SPECIFICATION

引用標準 Reference Standard	GB/T 14579 (IEC 60384-17)	
氣候類別 Climatic Category	55/105/56	
工作溫度範圍 Operating Temperature Range	-40°C~+105°C (+85°C to +105°C: decreasing factor 1.25% per°C for UR)	
電容量範圍 Capacitance Range	0.01uF ~ 4.7uF	
額定電壓 Rated Voltage	230Vac, 250Vac, 300Vac	
電容偏差 Capacitance Tolerance	± 5%(J)、± 10%(K)	
承受電壓 Voltage Proof	1.5UR (5s)	
損耗角 Dissipation Factor	≤0.1% (20°C, 1kHz)	
絕緣電阻 Insulation Resistance.	UR≤100V	CR ≤ 0.33uF IR ≤ 15,000MΩ CR > 0.33uF IR ≥ 5,000S

外型尺寸表 Dimension(mm)

230Vac					
容量 μF	W	H	T	P	d
0.033	13	9	4	10	0.6
0.047	13	11	5	10	0.6
0.068	13	12	6	10	0.6
0.10	13	12	6	10	0.6
0.10	18	11	5	15	0.8
0.15	18	12	6	15	0.8
0.22	18	13.5	7.5	15	0.8
0.33	18	14.5	8.5	15	0.8
0.47	18	15.5	9.5	15	0.8
0.33	26.5	15	6	22.5	0.8
0.47	26.5	16.5	7	22.5	0.8
0.56	26.5	17	8.5	22.5	0.8
0.68	26.5	17	8.5	22.5	0.8
0.82	26.5	19	10	22.5	0.8
1.0	26.5	20	11	22.5	0.8
1.2	26.5	20	11	22.5	0.8
1.5	26.5	22	12	22.5	0.8
0.47	32	18	9	27.5	0.8
0.56	32	18	9	27.5	0.8
0.68	32	18	9	27.5	0.8
1.0	32	18	9	27.5	0.8
1.2	32	20	11	27.5	0.8
1.5	32	20	11	27.5	0.8
2.0	32	22	13	27.5	0.8
2.2	32	24.5	15	27.5	0.8
3.0	32	33	18	27.5	0.8
3.3	32	33	18	27.5	0.8
4.0	32	33	18	27.5	0.8
4.7	32	37	22	27.5	0.8

250Vac					
容量 μF	W	H	T	P	d
0.010	13	9	4	10	0.6
0.015	13	9	4	10	0.6
0.022	13	9	4	10	0.6
0.033	13	11	5	10	0.6
0.047	13	11	5	10	0.6
0.068	13	12	6	10	0.6
0.068	18	11	5	15	0.8
0.10	18	12	6	15	0.8
0.15	18	13.5	7.5	15	0.8
0.22	18	14.5	8.5	15	0.8
0.33	18	15.5	9.5	15	0.8
0.22	26.5	15	6	22.5	0.8
0.33	26.5	16.5	7	22.5	0.8
0.39	26.5	17	8.5	22.5	0.8
0.47	26.5	17	8.5	22.5	0.8
0.68	26.5	19	10	22.5	0.8
0.82	26.5	20	11	22.5	0.8
1.0	26.5	22	12	22.5	0.8
1.2	26.5	24.5	15.5	22.5	0.8
1.5	26.5	24.5	15.5	22.5	0.8
0.47	32	18	9	27.5	0.8
0.68	32	18	9	27.5	0.8
1.0	32	20	11	27.5	0.8
1.2	32	22	13	27.5	0.8
1.5	32	25	13	27.5	0.8
2.0	32	33	18	27.5	0.8
2.2	32	33	18	27.5	0.8
3.3	32	33	18	27.5	0.8
4.0	32	37	22	27.5	0.8

外型尺寸表 Dimension(mm)

300Vac					
容量 μF	W	H	T	P	d
0.010	13	9	4	10	0.6
0.015	13	11	5	10	0.6
0.022	13	12	6	10	0.6
0.033	13	12	6	10	0.6
0.01	18	11	5	15	0.8
0.015	18	11	5	15	0.8
0.022	18	11	5	15	0.8
0.033	18	11	5	15	0.8
0.047	18	12	6	15	0.8
0.068	18	13.5	7.5	15	0.8
0.10	18	14.5	8.5	15	0.8
0.15	18	15.5	9.5	15	0.8
0.22	18	19	11	15	0.8
0.068	26.5	15	6	22.5	0.8
0.10	26.5	15	6	22.5	0.8

300Vac					
容量 μF	W	H	T	P	d
0.15	26.5	16	7	22.5	0.8
0.22	26.5	17	8.5	22.5	0.8
0.33	26.5	19	10	22.5	0.8
0.39	26.5	20	11	22.5	0.8
0.47	26.5	22	12	22.5	0.8
0.22	32	18	9	27.5	0.8
0.33	32	18	9	27.5	0.8
0.47	32	20	11	27.5	0.8
0.56	32	22	13	27.5	0.8
0.68	32	22	13	27.5	0.8
1.0	32	28	14	27.5	0.8
1.5	32	33	18	27.5	0.8
2.2	32	37	22	27.5	0.8